



genesis
NP

NP5-12
NP5-12FR



*Sealed Rechargeable
Lead-Acid Battery*

12V, 5.0Ah


Specifications

- **NOMINAL VOLTAGE:** 12V
- **NOMINAL CAPACITY:**
 - 20 hr. rate of 0.25A to 10.5V 5.0Ah
 - 10 hr. rate of 0.46A to 10.5V 4.6Ah
 - 5 hr. rate of 0.85A to 10.2V 4.3Ah
 - 1 hr. rate of 3.00A to 9.60V 3.0Ah
- **WEIGHT (approx.):** 4.41 pounds (2 kgs.)
- **ENERGY DENSITY (20 hr. rate):** 1.54 WH/cubic inch (94 WH/liter)
- **SPECIFIC ENERGY (20 hr. rate):** 13.61 WH/pound (30 WH/kg)
- **INTERNAL RESISTANCE OF CHARGED BATTERY:** 20 milliohms (approx.)
- **MAXIMUM DISCHARGE CURRENT WITH STANDARD TERMINALS:** 40 amperes
- **MAXIMUM SHORT-DURATION DISCHARGE CURRENT:** 120 amperes
- **OPERATING TEMPERATURE RANGE:**
 - CHARGE 5°F to 122°F (-15°C to 50°C)
 - DISCHARGE -4°F to 140°F (-20°C to 60°C)
- **CHARGE RETENTION (shelf life) at 68°F (20°C):**
 - 1 month 97%
 - 3 months 91%
 - 6 months 85%
- **LIFE EXPECTANCY:**
 - STANDBY USE 3 to 5 years
 - CYCLE USE (approx.):
 - 100% depth of discharge 250 cycles
 - 50% depth of discharge 550 cycles
 - 30% depth of discharge 1200 cycles
- **SEALED CONSTRUCTION:** Can be operated in any position without leakage.
- **STANDARD TERMINAL:** Quick Disconnect .187
- **HOUSING MATERIAL:** ABS Resin
- **OPTIONAL:** Container and cover made from Flame Retardant ABS (UL94-V0/L.O.I.>28%)

Terminals

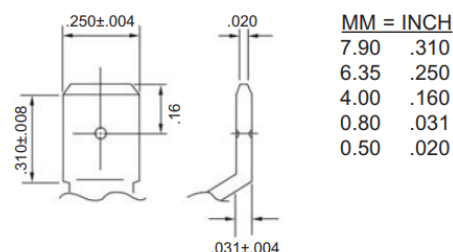

Dimensions

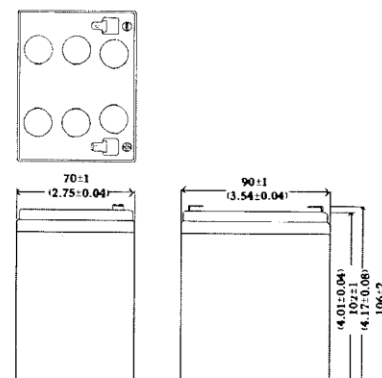


DIMENSIONS: MM (INCHES)

EnerSys
Power/Full Solutions™





RECOGNIZED BY UL, File No. MH 16464


DISCHARGE CHARACTERISTIC CURVES AT 25°C (77°F)

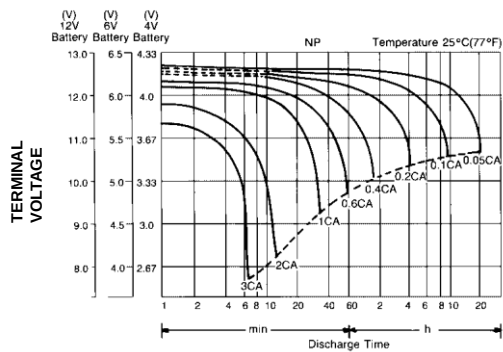



TEMPERATURE EFFECTS IN RELATION TO BATTERY CAPACITY

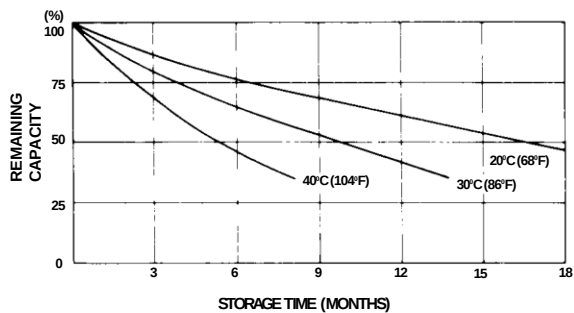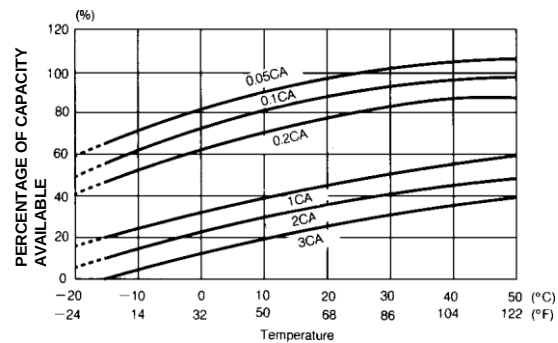

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

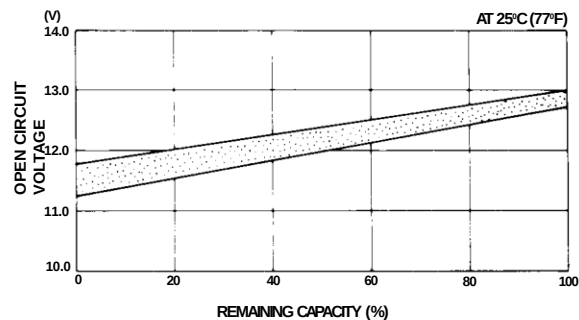

CYCLE SERVICE LIFE IN RELATION TO DEPTH OF DISCHARGE

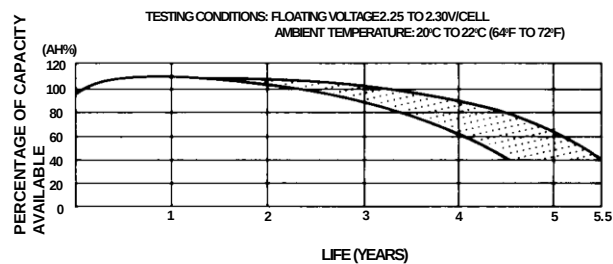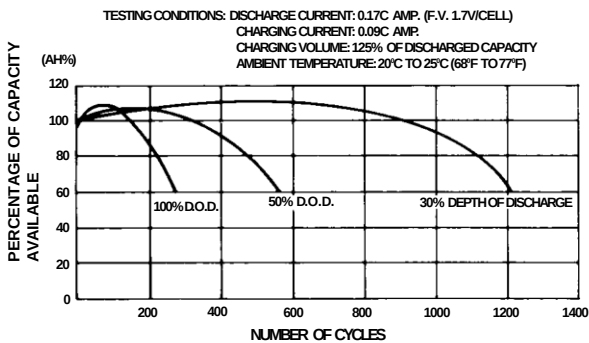

When the battery will be used by current in excess of 3C, consult with EnerSys, Inc. prior to use.

CHARGING METHODS (At 20°C)

Cycle use: Maximum charging current 1.25A
Charging voltage 14.4 to 15.0V
Standby use: Float charging voltage 13.50 to 13.80V

CAUTION

- Avoid short circuit
- Do not charge in a sealed container.



EnerSys Inc.
P.O. Box 14145
Reading, PA 19612-4145
USA
Tel: +1-610-208-1991
+1-800-538-3627

EnerSys EMEA
Brussels, Belgium
Tel: +32 (0)2 247 94 47
EnerSys Asia
Guandong, China
Tel: +86 755 2689 3639

Represented by: